


24 inch diameter x 3/8", Yielder Manganese Steel, Tougher with Time. Defies abrasion in sand and rock strewn soils.
 25 inch diameter x 1/2", Ultra Endurance option for lowest operation cost in very tough conditions.

Extreme Edge
 Single edging allows self closing slot. Rock Strewn Soils.
 Double edging allows self cleaning edge and self closing slot. Gumbo Clay Soils.

Superior sealing, No greasing, Timken pinion bearings.
 Industrial rated design for long life.
 3,300 pound rated oil filled, Duo Cone sealed hub.
 5/8 bolts with shock loading precision pilot.

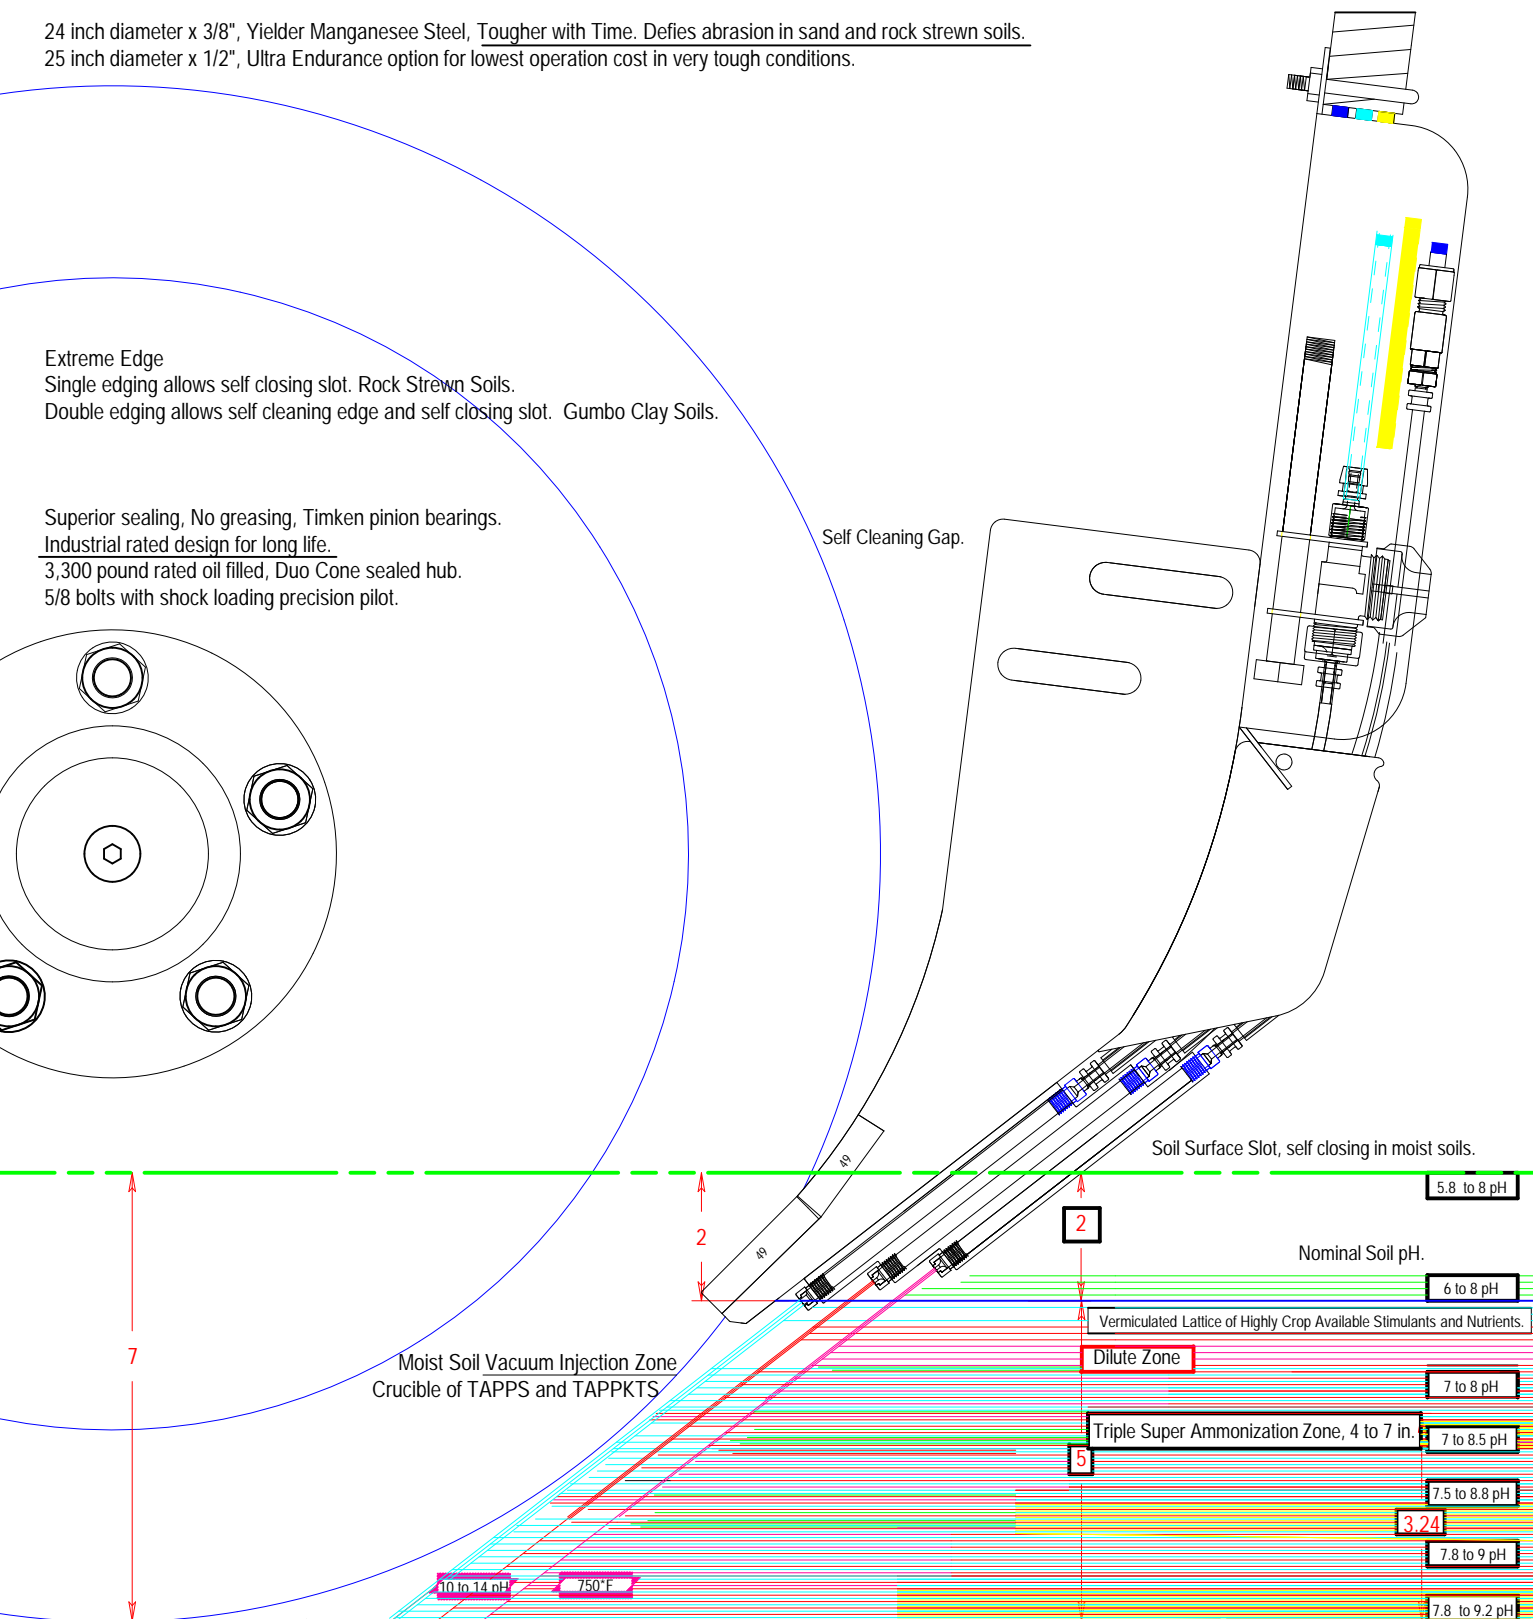

49 Chrome Construction Bit.

Vermiculated Vertical Column of Crystalline TAPPS, TAPPKTS, Hydra Hume, AZn and Micro nutrients.
 Acid Base Reaction with 14 pH NH₃ and 6.0 to 7.0 pH Humic Acid, APP/ATS/KTS.
 Temperature of Reaction similar to a TVA Reactor at 750 degrees F.
 Applied at accuracy levels of 1% CV with high pressure orifice injection.

Band pH, .75 inch width x 7 inch depth.
 Following Application
 15 inch bands, 140 pounds N as NH₃
 APP/ATS/KTS/AZn/ Hydra Hume.